


IS-DF208 Series

8-port Fast Ethernet Unmanaged Layer 2 Industrial Ethernet Switch



The IS-DF208 Series are cost-effective unmanaged Fast Ethernet Switches that provide 8 copper ports. With plug-n-play, easy to use, and its compact size, the IS-DF208 Series can easily be used in factory production line, embedded into machine system or applied for any simple network expansion. The IS-DF208 Series is the perfect solution for general application and edge site installation.

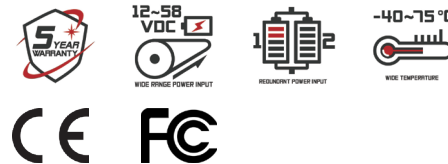

Key features

- ▶ 8 10/100Mb Copper ports
- ▶ IEEE 802.3x flow control & back-pressure
- ▶ Layer 2 Line-Speed Switching Fabric, non-blocking
- ▶ Wide-temperature range (-40~75°C)
- ▶ Redundant power input (12~58 VDC)
- ▶ Reverse power protection
- ▶ Din-Rail mountable
- ▶ IP 30 Protection
- ▶ Rugged Fan-less design

Specification

Ethernet

Operating Mode	Store and Forward, L2 wire-speed/non-blocking switching engine
MAC addresses	1K
Packet Buffer	1 Mbits
Backplane / Switching Fabric	1Gbps

RJ45 Copper ports

Speed	10/100 Mbps
MDI/MDIX Auto-crossover	Support straight or cross wired cables
Auto-negotiation/Duplex	10/100 Mbps speed auto-negotiation; Full & Half Duplex

Protocols & Standards

IEEE 802.3, IEEE 802.3x, Flow Control, Back Pressure, TCP/UDP

Power

Power Input	Redundant Power Input, DC terminal Block
Input Voltage Range	12-58 VDC
Reverse power protection	YES
Power Consumption	IS-DF208 3.5 Watt

Indicators

Power status indication	Power Input status
Ethernet port indication	Link & speed

Environmental and Compliances

Operating Temperature	-40~75°C (Cold startup at -40°C)
Storage Temperature	-40~85°C
Humidity	5~95% (Non-Condensing)
Vibration, shock, free fall	IEC-60068-2-6, -27, -32
Certification Compliance	CE, FCC